


APPLICATION & COMPARISON CHART FOR B60, B4500K & BV208DA

The following chart illustrates typical conduit installation. Fewer bends and lighter pull lines can increase the maximum distances obtainable. The chart below refers to a typical run with (4) 90° bends and no obstructions or leaks, using JetLine® PL232 Pull Line (200# test) and foam line carriers.

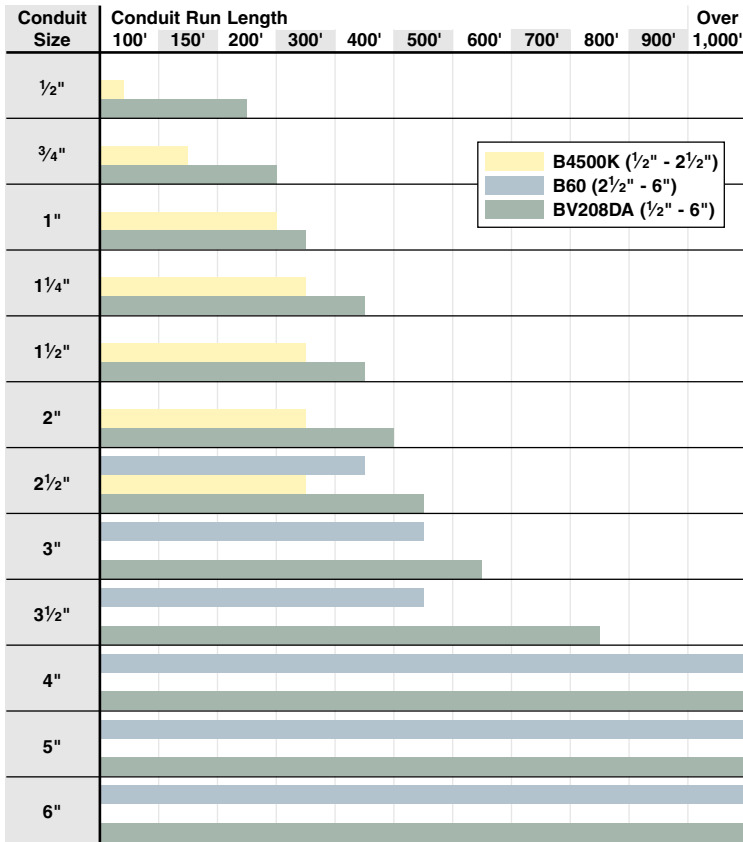

APPLICATION & COMPARISON CHART FOR JO25C, JO25, JO220 & JO250

The following chart illustrates typical conduit installation. Fewer bends and lighter pull lines can increase the maximum distances obtainable. The chart below refers to a typical run with (4) 90° bends and no obstructions or leaks, using JetLine® PL232 Pull Line (200# test) and foam line carriers.

