






Rating	16A 125VAC 1/3HP, 10A 250VAC 1/2HP 	Mounting Hole	Circuit Diagram	
	10A 125VAC, 6A 250VAC  10(4)A 250V~ 10E3 			
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-25°C~85°C			
Switch Function	3P SPST ON-OFF (Neon dependent)	Thickness	X	Y
		0.75~1.25	19.2-0.1	13.0+0.1
		1.25~2.0	19.4-0.1	13.0+0.1
		2.0~3.0	19.8-0.1	13.0+0.1



Frame: Black, Nylon#66  
 Actuator: Red, PC  
 Packing: As GB's standard pack  
 ( 1 pce/blister card, 5 pcs  
 /box stick with one label)

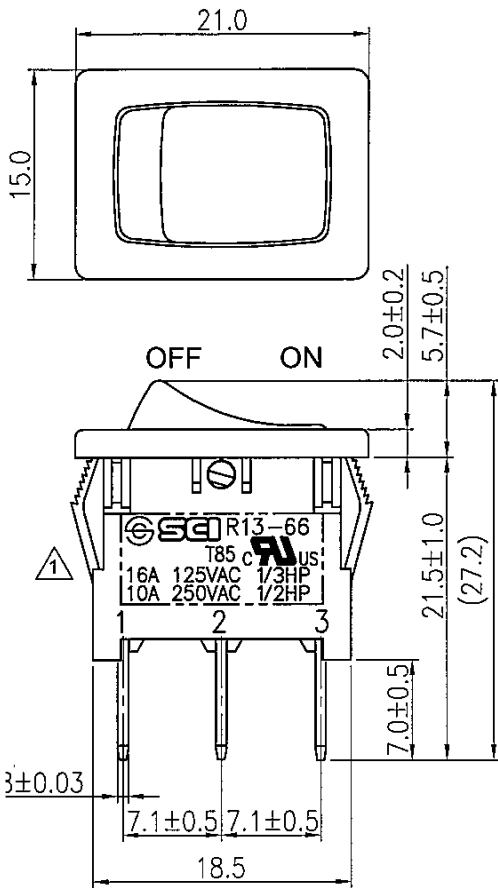