

Punches 7/8" (22.2mm) &
1 11/32" (34.1mm) holes



CAUTION

Read & understand this instruction book completely before operating product. Failure to understand safe operation of this tool can cause injury.

GARDNER BENDER is not RESPONSIBLE FOR DAMAGE OR INJURY CAUSED BY UNSAFE USE, MAINTENANCE OR THE APPLICATION OF ITS PRODUCTS. Please contact Gardner Bender for guidance when you are in doubt as to the proper safety precautions to be taken in designing and setting up your particular application.


Changing the punch and die

Note: When changing the punch or die, be sure to match the punch and die to the same size. Punch and dies sizes must match for the tool to operate properly and safely. Only authorized Gardner Bender replacement punches or dies will work in the SP-7 Stud Punch

SP-7 Stud Punch includes two different size punches: 7/8" (22.5mm), 1 11/32" (34.1mm)



1) To remove punch from SP-7 unscrew hex bolt at center of punch using a #5 hex wrench.

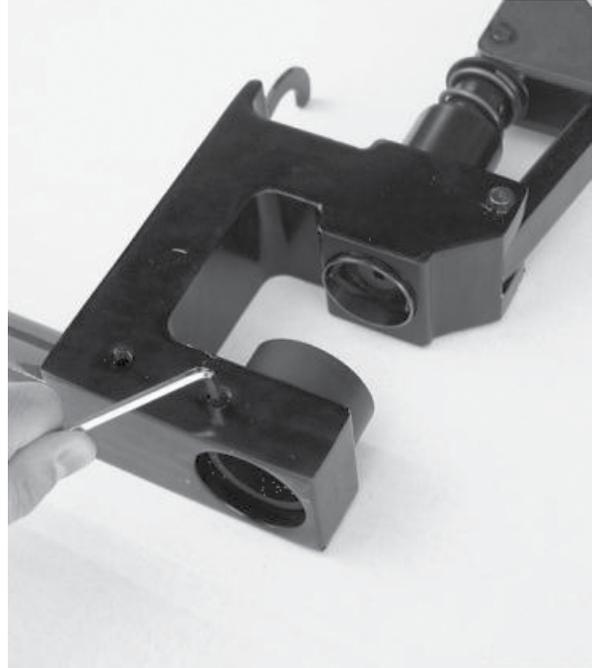

2) To remove die loosen the hex bolt closest to the die located on C-frame.


Application



GB[®]
Gardner
Bender

www.gardnerbender.com | N85 W12545 Westbrook Crossing | 800.624.4320 | tech.support@gardnerbender.com

PARTS LIST

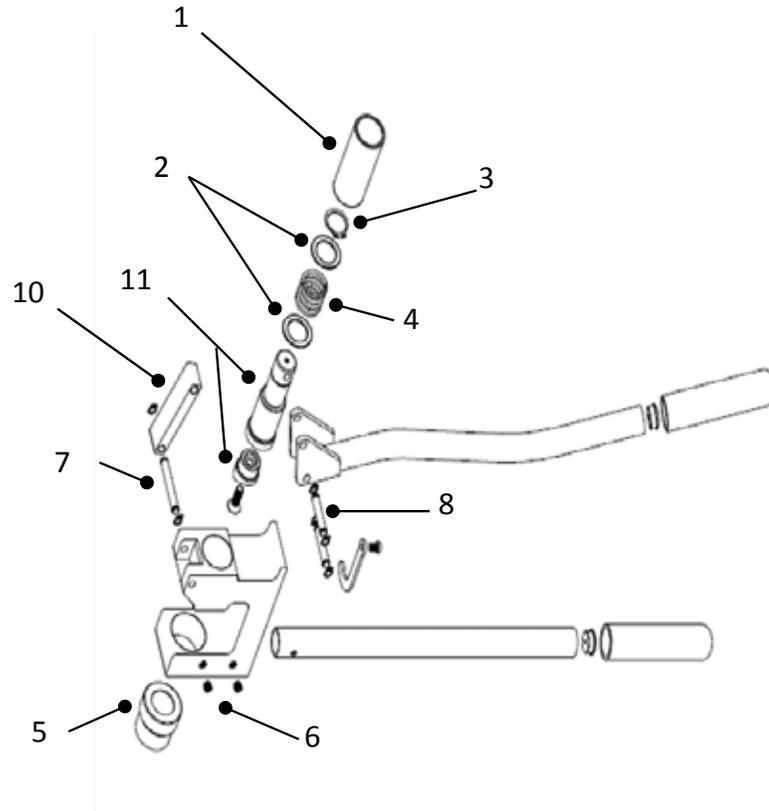

Kit #	Comp. #	Description	Qty
SP7SSK2		Replacement Spring & Sleeve Kit	
	1	Bushing	1
	2	Washer	2
	3	Split Washer	1
	4	Spring	1
SP7PDK2		Replacement Spring & Sleeve Kit	
	5a	22.2mm Die	1
	5b	34.1mm Die	1
	6	Set Screw	2
SP7PLK2		Replacement Pivot Link Kit	
	7	Pivot Link Pin with Retaining Rings	1
	8	Handle Pin with Retaining Rings	2
	10	Pivot Link	1
SP7PK2		Replacement Punch Kit	
	11	Punch Kit Assembly	1
		<i>Punch Body</i>	
		<i>22.5MM Punch</i>	
		<i>34.1MM Punch</i>	
		<i>Set Screw</i>	
	8	Handle Pin & Retaining Rings	2

Note: Components sold in kits only -not separately



Stud Punch Accessories

Patented One-Piece Design



Code-compliant protection for NM Cable in both factory and field punched metal studs.

Exclusively from Gardner Bender, new SnapSHOT™ Universal Stud Insulators provide code mandated* 360° protection for cable runs through increasingly popular metal studs, where sharp hole edges could otherwise gouge plastic or rubber-jacketed electric, communications or network cable. The patented one-piece design and folding tabs make installation literally a snap, resulting in a tight and secure attachment to the stud. The smooth, hang-free surface eases pulls, while the high-density SnapSHOT™ design accommodates any shape pre-punched hole or standard 1 1/32" field-punched holes.

*Meets requirements of NEC Article 300-4(b) and CEC Rule 12-516.

Feature Comparison

		Caddy	Greenlee	Arlington
Fits factory punched holes/standard holes	•	•	•	•
Easy to install design	•			
One-piece installation	•			
UL approved	•		•	•



Part #	Description	Pkg	Qty
SI-25N	Metal Stud Insulator	Bag	25

REPAIR AND SERVICE INSTRUCTIONS: For repair service and parts contact your nearest Gardner Bender Service Center. The Gardner Bender Service Center will provide complete and prompt service on all Gardner Bender products.

PARTS AND SERVICE: For quality workmanship and genuine Gardner Bender parts, select an Authorized GB Service Center for your repair needs. Only repairs performed by an Authorized Service Center displaying the official GB Authorized sign are backed with full factory warranty. Contact Gardner Bender (414)352-4160 for the name of the nearest GB Authorized Service Center.

WARRANTY: Gardner Bender warrants its product against defects in workmanship and materials for 1 year from date of delivery to user. Warranty does not cover ordinary wear and tear, abuse, misuse, overloading, altered products or use of improper fluid.

WARRANTY RETURN PROCEDURE: When question of warranty claim arises, send the unit to the nearest GB Authorized Service Center for inspection, transportation prepaid. Furnish evidence of purchase date. If the claim comes under the terms of our warranty the Authorized Service Center will REPAIR OR REPLACE PARTS AFFECTED and return the unit prepaid.

IMPORTANT: RECEIVING INSTRUCTIONS

Visually inspect all components for shipping damage. If you find damage, notify the carrier at once. Shipping damage is NOT covered by warranty. The carrier is responsible for all repair or replacement costs resulting from damage in shipment.

